



techpos

Terminal de Pagos Inteligente




NUEVO 9220

Seguro Sistema Operativo Asmart basado en Android 10.X

CPU Qual Core de alta calidad y pantalla táctil HD de 5.5 pulgadas garantizan una experiencia interactiva agradable.

Excelente diseño ergonómico y apariencia compacta que se adapta a los hábitos de uso.

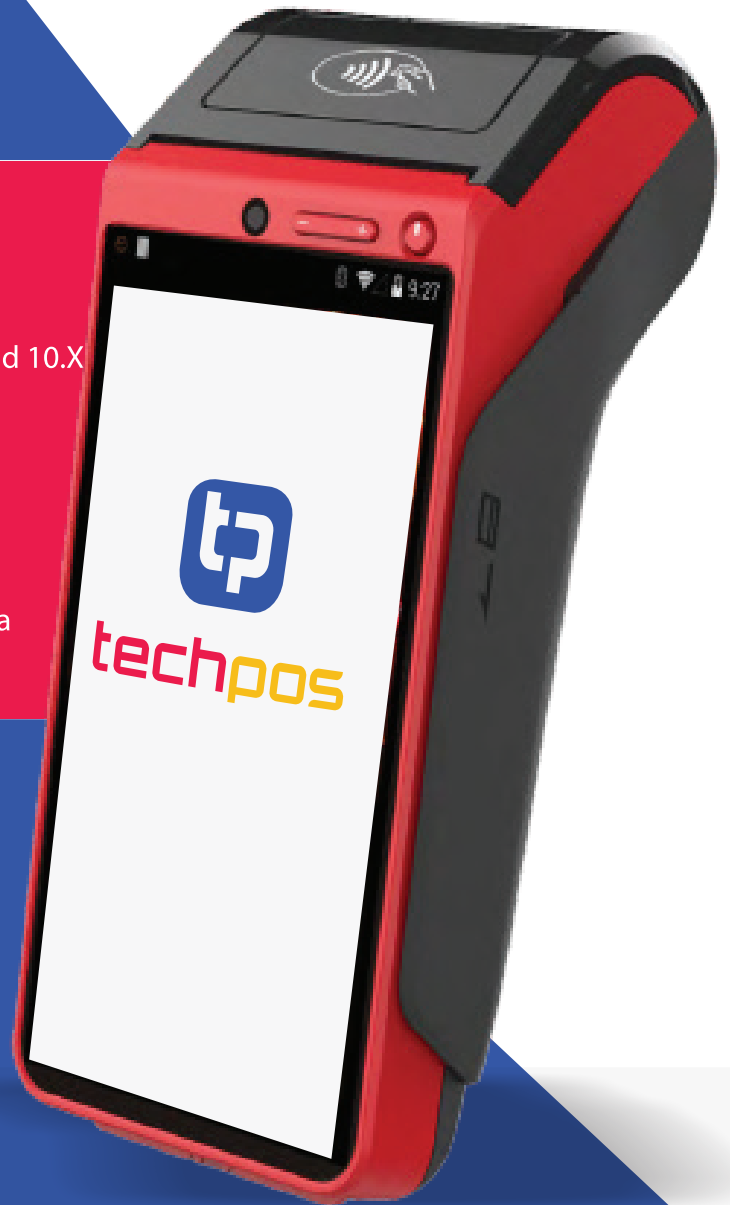

NUEVO 9220

Terminal de Pagos Inteligente

◀ Especificaciones ▶

Procesador	High Performance 4 Core Processor+Special secure CPU
Sistema Operativo	Asmart System based on Android 10.X
Memoria	DRAM:1G FLASH: 8G; Supports Micro SD/TF Card, up to 32G
Pantalla	5.5-inch and 1280*720 pixels capacitive color touch screen, supports electronic signature capture.
Lector Magnético	Track 1/2/3,bi-directional, compliant with ISO7811, 7812
Lector de Smart Card	Supports Memory Card, SLE4442/4428, CPU Card, Compliant with EMV4.3, PBOC3.0, ISO7816 Standard.
Lector Contactless	Supports Mifare Card, SONY Felica. Communication Frequency: 13.56MHz.Compliant with ISO/IEC 14443 Type A&B
Seguridad	Internal Virtual PED.Supports MK/SK, DUKPT, FIXED.3DES, RSA, AES, SHA-256, Sm2, Sm3, Sm4, Algorithms.
Comunicación	LTE-TDD,LTE-FDD, WCDMA/HSPA/HSPA+, TD-SCDMA,GSM/GPRS, WIFI, Bluetooth (2.1-4.1)
Posicionamiento Satelital	GPS,BEIDOU, GLONASS
Cámara	Front Camera: 300 thousand pixel; Rear Camera: 5-mega pixel, with flash, auto focus; 1D&2D scanner.
Multimedia	Supports recording and broadcast; 720P video recording, 1080P video playback.
Impresora	High-speed thermal printer, Paper roll width and diameter: 58mm / 40mm

Características

- ▼ PCI PTS 5.X, EMV, PBOC3.0, UnionPay Security, aprobado UnionPay Cloud POS
- ▼ Equipado con protección contra manipulaciones múltiples y mecanismo de autodestrucción
- ▼ Acepta varios métodos de pago, incluidas tarjetas, NFC, código de barras / pago QR, etc.
- ▼ Ampliamente utilizado en finanzas, venta minorista, logística, seguros y otras industrias.

Puertos	1*Micro USB OTG, supports charging, communication.
Botones	Power switch, 2*Volume keys
Card Slots	1*SIM,2*SAM, 1*SD Card
Batería	Built-in lithium battery, 7.2V/2600mAh
Power	Input: 100-240V AC, 50/60Hz; Output: 5.0V DC, 2.0A
Entorno de Trabajo	Temperature: 0°C-50°C(32°F-122°F) Humidity: 10%-90%(Non-condense)
Entorno de Almacenamiento	Temperature: -20°C-60°C(-4°F-140°F) Humidity: 5%-95%(Non-condense)
Certificaciones	PCI PTS 5.X, EMV LEVEL 1&2, PBOC3.0, UnionPay Security Certification, UnionPay Cloud POS Certification.(More certifications are in progress)
Opcional	Docking Station



Scanning base(optional)

Charging base(optional)



techpos